

# A Versatile RF-Digital Baseband Generator for Applications in Communications

Ch. Arun Kumar, Sc C, M.V.Ravindra Kumar, Sc E, J. Manjula, Sc G  
Defence Electronics Research Laboratory  
Chandrayana Gutta, Hyderabad – 500005, INDIA  
Tel: 91-40-24585314; Fax: 91-40-24306466; email: [manjula.j@drl.drdo.in](mailto:manjula.j@drl.drdo.in)

Nitesh Gupta, Vikas Akalwadi, Phaneendra T.  
CoreEL Technologies (I) Pvt. Ltd., Koramangala, Bangalore -560 034, INDIA  
Tel: 91-80-41970400; Fax: 91-80-30723638; email: [vikas@coreel.com](mailto:vikas@coreel.com)

**Abstract-** Performance of any Communications or RADAR system is significantly enhanced when it has the capability to generate various types of signal waveforms on-the-fly with the least changeover time. The signal can either be generated at Intermediate Frequency (IF) directly or using the base-band components, which are combined to form the IF signal. Some of the types of waveforms typically generated are continuous wave, frequency modulated, amplitude modulated or sweep signals. This paper emphasizes on the generation of waveforms digitally using Field Programmable Gate Arrays (FPGA's), and at the same time converting digital signals to analog signals on-board using ultra high speed Digital to Analog converter (DAC) operating at speeds of 2 GSPS. System-on-chip concept is used by implementing soft processor core "MicroBlaze" on Xilinx FPGA, thereby reducing component count on the board and thereby design's complexity. This paper also focuses on the high-speed mixed signal design aspects as traditional methods of board layout techniques no longer work at GHz speeds. A comparison of the DAC datasheet specifications and real-time results is provided to show how mixed signal design techniques helped to achieve a close match.

**Key Words-** FPGA, PCB design techniques for high speed ADC/DAC and RF, Configurable Waveform Generation, AM, FM, Scalability, CPWG, SFDR, Phase Noise

## I. INTRODUCTION

Generation of the appropriate base band signal waveform is an important parameter for Communication Systems. Such waveform generators cover wide range of applications from secure communication systems to electronic countermeasure systems. In previous generation of such systems transmitted waveforms were generated in the analog domain [2]. Likewise, receive signal processing was also carried out in the Analog domain. Modern communication systems perform up-conversion, down-conversion, and receive signal processing functions in the digital domain. Processing in the digital domain significantly reduces design complexities of analog domain, provides programmable options, and enhances design scalability. With the technological advancements, sampling rates of high speed DAC's are moving northwards, which require processing of digital data at very high clock rates. Modern day high-density Field Programmable Gate Array (FPGAs) are best suited for such applications as they provide

very high computational bandwidth. Also, the latest technology demands need for a quicker reaction to an action, such as Electronic Counter Measure in the Electronic Warfare. FPGAs can implement time-critical events in real time, thereby enabling a faster response. Baseband Generator enables generation of a wide variety of waveforms based on the commands received from a companion sub-system or a user friendly GUI implemented on a host controller PC. The frequency of the generated waveform is in the range of 2 MHz to 600 MHz. In this paper, we present the (FPGA) based implementation of Baseband Generator for Electronic Counter Measure applications.

## II. SYSTEM DESCRIPTION

Top level architecture of the Baseband Generator is depicted in Figure 1. Baseband generator essentially consists of 3 key components – FPGA and DAC based hardware platform, RTL implemented on Virtex-5 FPGA, and software running on the MicroBlaze processor core. Additionally, user-friendly GUI is implemented on a host controller PC, which sends commands to the MicroBlaze processor over Ethernet interface, and as well receives periodic updates from the MicroBlaze. Details of the GUI are not in the scope of this paper.

## III. HARDWARE PLATFORM

Hardware platform broadly consists of a single 2 GSPS, 12-bit DAC from Teledyne, Virtex-5 FPGA from Xilinx, GigE Ethernet link, clock generation circuitry, voltage regulators, on-board debug components, and power monitor and temperature monitor circuits. An EEPROM is provided to store design specific information such as Ethernet MAC ID, hardware version, software version and RTL version. A low speed ADC input interface is provided to supply a modulating signal. Baseband generator digitizes this analog input and uses this information to generate an AM or FM modulated signal. Platform Flash is provided for storing FPGA programming file. Clock for the DAC operation needs to be stable. Therefore an external OCXO supplies 100 MHz reference clock to the on-board clock synthesizer having integrated VCO. Reference clock is fed to the hardware platform via SMA connector interface.

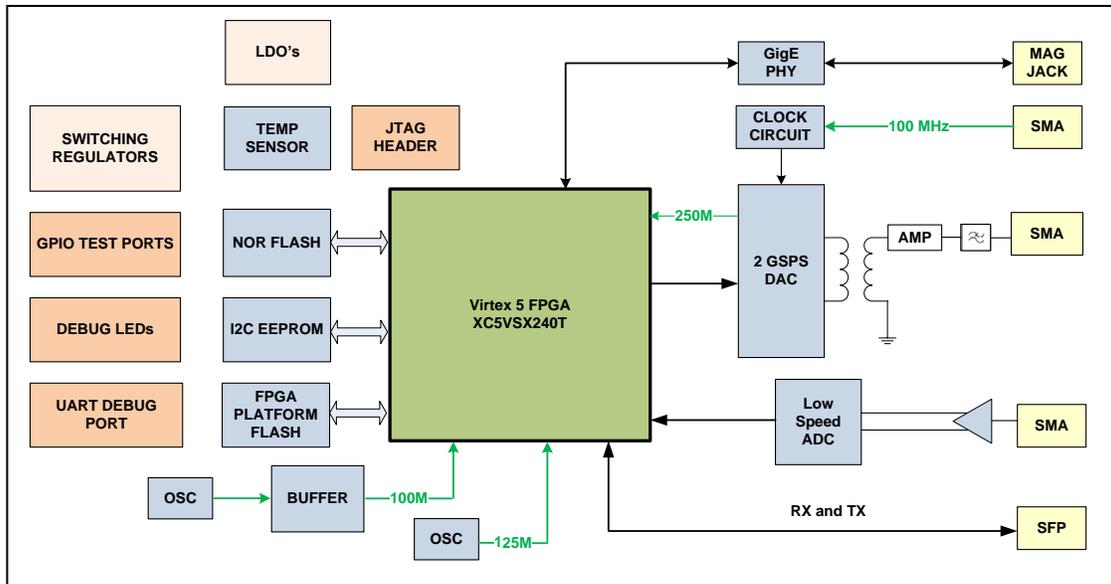


Figure 1: Base-band Generator top-level Architecture

An optical link interface capable of operating up to 3.125 Gbps data rates and a custom serial interface operating at 40Mbps is provided for future scalability. The data received over this link can be transferred over the high speed DAC interface transparently or after carrying out digital signal processing in the FPGA. This enables Baseband Generator to switch at a speed of 10us between two frequencies. The baseband Generator, essentially working on DDS principle, switches between the frequencies in a phase continuous manner, giving out practically no switching spurs. Baseband generator can act as a Repeater Jamming Unit by receiving data from the System Receiver through the System Controller via this high speed serial link and transmitting delayed mirrored copy over the DAC, sufficiently modified to protect friendly communications.

Based on the hardware features discussed above, DLRL & CoreEL have realized a baseband generator module capable of generating Multiple Carriers, Modulated signals, Modulating signals and Sweep signals up to 600 MHz. DAC performance on this hardware platform is very close to its Datasheet specifications as PCB design techniques for high speed ADC / DAC and RF signals are strictly followed.

#### IV. BASE-BAND GENERATOR RTL

Figure 2 shows the RTL implementation of Based-band Generator. It is a signal generator capable of generating Carrier Wave or Modulated signal in the output frequency range of 2 MHz to 600 MHz. RTL design consists of following sub modules. MicroBlaze processor, the embedded sub-system module accepts commands from the host controller through GigE Ethernet interface and configures appropriate registers to generate the user selected waveform.

Register interface module contains a set of registers classified as – control registers (R/W) which can be read or written by the processor and status registers (read only) which are set by the RTL logic and can be read only by the processor. ADC interface accepts the sampled ADC data from the external low-speed ADC chip and the sampled values are used as modulating signal to generate AM/FM data.

Message signal generator consists of a look-up-table (LUT) that stores the data samples corresponding to a modulating signal. This LUT is initialized by the embedded sub-system as per the data provided by the host controller.

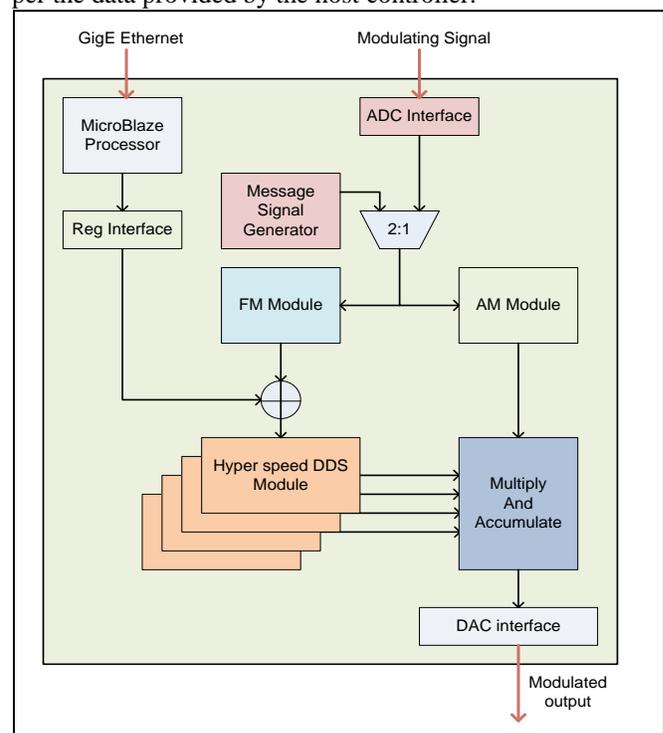


Figure 2: Baseband Generator RTL Block Diagram

As an alternate option to the ADC samples, data from the look-up-table can be read and provided as modulating signal to AM/FM.

AM module provides the Modulating signal data samples to the MAC (Multiplier and Accumulator) for generating AM modulated signal. The AM modulating data can be selected either from the LUT or an external ADC interface based on the command received from the host controller. Modulation index / depth can also be programmed for the AM module.

FM module is used to select the Frequency deviation based on the selected Modulating signal frequency. A range of frequency deviations can be supported.

SSB module takes modulating signal data from the external ADC/Internal LUT for generation of LSB or USB signal based on the command received from the host controller. This module also forms a basis for various digital (IQ) modulations like QPSK.

Baseband generator provided with maximum of 256K RAM for generation of any type of Arbitrary Waveform. This makes baseband generator capable of generating of Wideband Sweep with protected frequencies or wideband barrage signal to counter LPI signals such as FH Communications. Also customized secure communications waveforms or countersignal waveforms can be programmed in this space for relevant operations dynamically, favoring Software Defined Radio / Jammer Architectures.

Hyper-speed DDS block implements the Direct Digital Synthesis (DDS) functionality. It consists of 2-modules namely phase accumulator and ROM bank. The phase accumulator module generates the phase addresses based on the received Frequency Tuning Words (FTW) and provides them as an address to ROM bank. The ROM bank provides the data samples corresponding to the phase address provided.

Multiply and Accumulate engine multiplies the generated carrier wave from the DDS with the modulating signal provided by the AM module in case of AM modulation. All the DDS output frequencies are added together by the Accumulator in case of multi-carrier (FDM as well as TDM) generation. Scaling logic is implemented as part of this engine to avoid DAC saturation during Simultaneous Multicarrier Generation. This Simultaneous Multicarrier Generation is required to generate OFDM waveforms for communication applications.

DAC interface provides digital samples corresponding to the user selected baseband frequency to the on-board DAC at a rate of 250 MHz LVDS DDR. Data format supported is offset binary. Due to the constraints posed by high speed DAC, RTL design is pipelined sufficiently to meet the timing closure requirements within the FPGA.

## V. BASE-BAND GENERATOR SOFTWARE

Xilinx's series of FPGAs provide the flexibility of implementing soft processor core "MicroBlaze" [4] using the Xilinx Embedded development Kit (EDK). These embedded processors are seamlessly integrated with other essential components of an embedded sub-system such as Trimode Ethernet MAC core, UART controller, I2C controller etc.

Processor application code is compiled and stored in the Block Memories, which are integral part of any FPGA. This avoids the need for external memory components. MicroBlaze processor provides connectivity with external world over

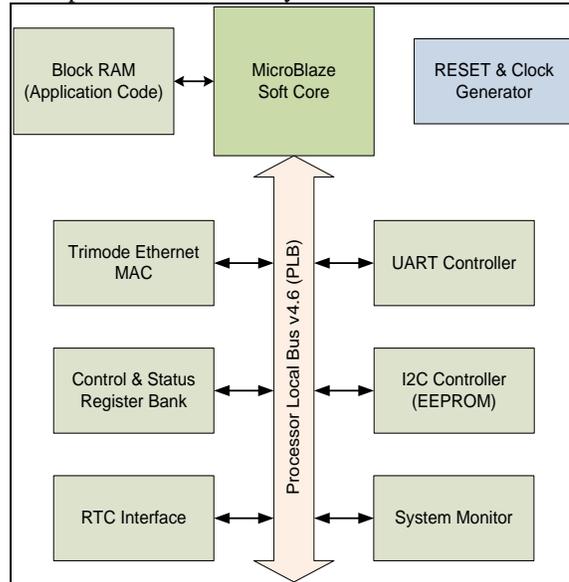


Figure 3: Representative embedded processor sub-system

Gigabit Ethernet interface. UART connectivity is provided for debug purpose. Commands received over the Ethernet interface are parsed and appropriate settings are made to the control registers to achieve desired functionality. The type of waveform to be generated is configurable on-the-fly by user. Also, the board status is monitored for health parameters such as voltages and temperature and is reported periodically to the host controller.

## VI. HIGH SPEED DESIGN CHALLENGES

Higher sampling rate of DAC resulted in an increase in the design complexity in terms of FPGA RTL design as well as high speed PCB design. Data interface from FPGA to the DAC is 48-bit, four 12-bit samples. Since the DAC is sampled at 2 GSPS, data from FPGA shall be transferred at 500 MHz SDR or 250 MHz DDR. Current implementation transferred data to the DAC using 48 differential lines each operating at 250 MHz LVDS DDR. All these lines have to be aligned on-board such that data on all the lines reaches DAC at the same time, which puts tighter constraints on the length matching requirements on the PCB. All these differential routes are length matched on the board to a tolerance of 200 mils.

FPGAs too have internal routing delays, which can significantly impact the signal timings. Therefore, FPGA internal logic needs to drive data onto all the DAC interface pins at the same time. A mismatch in the digital data arrival time at the DAC might lead to the incorrect sampling by the DAC and thereby design failure. This is achieved by clocking all the signals from the FPGA to the DAC in the input output blocks (IOBs) of Xilinx FPGA [3]. Clocking a signal in the IOB moves it closure to the FPGA pad and ensures that

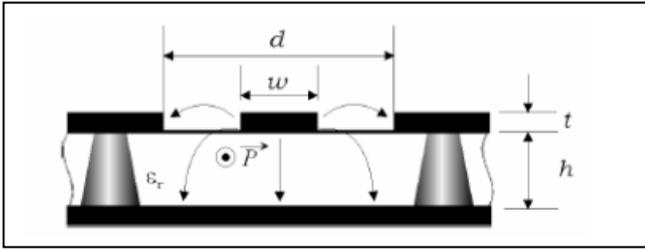


Figure 4: CPWG Cross-Section

internal routing delays in the FPGA do not affect the overall design performance.

As the DAC sampling clock is 2 GSps, the maximum signal frequency generated by the DAC is limited to 600 MHz in the present work. Clock circuitry driving 2 GHz clock to the DAC is to be properly shielded, so that it does not get affected by other areas of the design, while at the same time it should not affect other sections on-board. Similar argument holds good for analog output of the DAC. Traditional PWB layout design techniques no longer work at GHz speeds. The complexity level increases further as both digital and analog components are part of the same PCB, which requires isolating analog section from the digital section. Therefore, 2 GHz clock and high speed analog signals are shielded in such a way that interference from adjacent signals on the same layer or the layers below is minimized. This is accomplished by following Grounded Coplanar Wave Guide (CPWG) as the transmission line method for high speed signals. Figure 4 depicts a typical CPWG cross section. Here, via holes connect the lateral ground planes on the top side of the wafer to bottom side.

Also, signal integrity problems are minimized by – keeping the traces as straight as possible, having a maximum of 2 via in the signal path, using arc shaped traces instead of right-angles bends as shown in Figure 5.

## VII. MIXED SIGNAL DESIGN ASPECTS

Combining High Speed Digital and Analog Signal circuits into a Small form Factor Solution requires special care during Board design and Layout. Noise reduction on a Mixed Signal board is to start from the Digital Section.

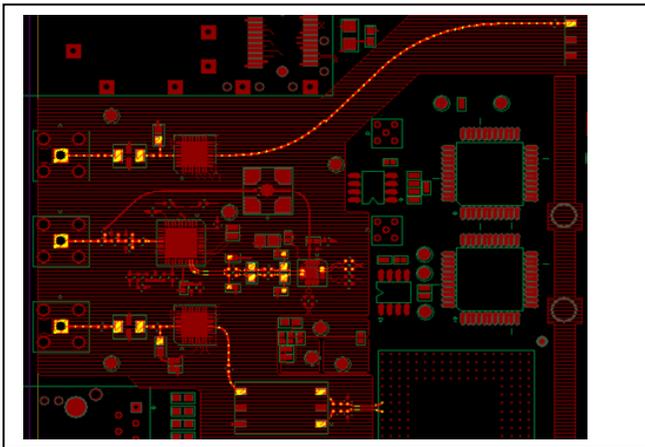


Figure 5: Arc shaped Signal Routing

FPGAs can generate supply/ground bounce when switching at high frequencies. Supply and ground bounce are taken care of by reducing the simultaneously switching outputs (SSO), spreading SSO pins, using low slew rate signals, proper decoupling of power supply pins and by using series terminations wherever possible.

All high speed interfaces on board are terminated properly. Any transmission line will result in reflection if not terminated properly. Wherever possible, low noise I/O standards like LVDS are used. All high speed signals have a continuous solid reference plane below it, as discontinuity in reference plane can lead to increased crosstalk, reflections and EMI.

Digital and Analog circuits on-board are carefully partitioned. The component placement is done in such a way that stray digital current are not allowed to pass through the analog section to the extent possible.

Majority of the DACs require low impedance connection between its AGND and DGND pins. To provide this low impedance path, the AGND and DGND are shorted below the DAC. PCB layout is done in such a way that all data lines to the DAC see a solid reference plane. The Analog section is shielded by placing ground vias. Enough ground vias are staggered in the analog section to act like a solid ground plane.

Star topology is used to route power to the Analog section. The Digital power section is placed away from the analog power to avoid coupling of DC-DC switching noise to the analog supply. The Moats on ground plane around the AGND ensure that no return path exist for the digital signal. Input voltage to the LDO is filtered to remove SMPS switching noise. A DC-DC pre-regulation stage is provided to enhance the efficiency of the analog power section and to reduce the heat dissipation. Figure 6 shows how the analog and digital sections are isolated on-board.

## VIII. CONCLUSIONS

Baseband Generator has been tested extensively in the lab for generation of various types of waveforms discussed above and the results have met the design specifications in terms of functionality and output power levels. SFDR achieved on the board is -50 dBc at 600 MHz, while datasheet specification is -52 dBc. Phase Noise performance achieved on-board is -104 dBc/Hz at 1 KHz offset. This holds a great promise for future

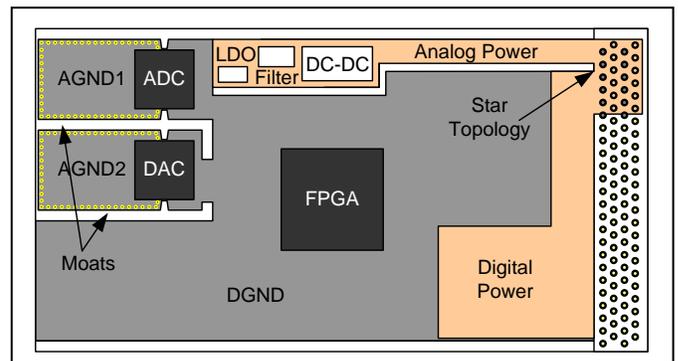



Figure 6: Isolation between Digital and Analog Supply

Communication systems as it provide enhanced performance capabilities.


As is true for most of the Military Communications applications, it is difficult to determine for Electronic Warfare applications too whether the requirement for more processing power is driving the need for powerful hardware, software and RTL, or whether the designers in the related areas are proactive in identifying the opportunities and coming up with new ideas as and when a powerful hardware, software or Integrated circuit is released in the market. Programmability however is the driving force, so that a common hardware platform can be used for a wide variety of applications by modifying the software and/or RTL components. In a nut shell, today's communication systems are dependent on 3 key factors – more processing power, programmability & scalability, and ease of use. Application demands have outpaced the processor's ability to deliver, and that's where the FPGA's offer tremendous processing potential. They can support pipeline structures of variable depth and provide parallel computing resources, allowing even highly complex functions to be implemented with single-clock cycle execution. The programmability of FPGAs ensures that they can be tuned to meet the specific needs of an application without changing the hardware platform. Also, with the growing requirements for scalability, the need to adopt to constantly changing applications and the necessity of launching new applications as rapidly as possible, FPGA based implementations have come out handy because of its ease of use, and simultaneously providing important improvements in developer's productivity.

Xilinx Virtex-5 FPGAs have proven to be a success for Baseband Generator in terms of computational power. The release of Virtex-7 family and especially the Zync series with ARM processors holds greater scope for improvements and enhanced capabilities due to even faster data rates, higher processing resources, lower power consumption and hence improved thermal management. Virtex-7 FPGA based solution would prove to be cost effective too.


### RESULTS

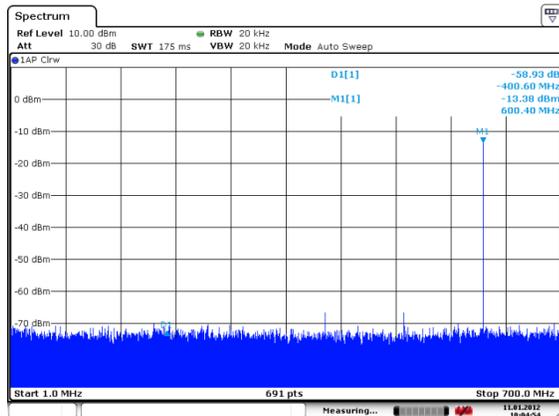


600MHz Carrier Wave

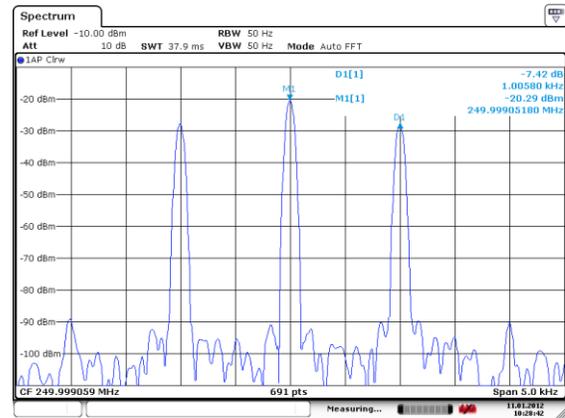


AM Modulated Output  
CW=250MHz,modulating signal=1KHz

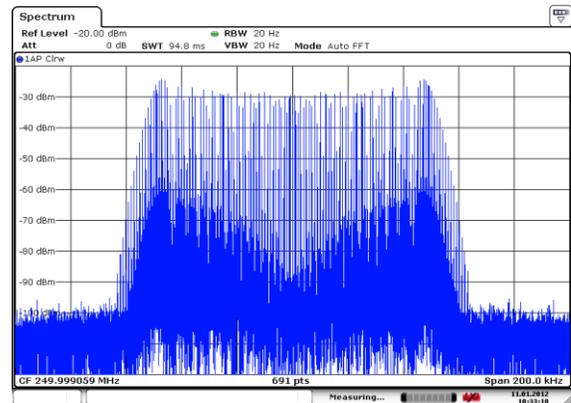


FM Modulated Output  
CW=250MHz,modulating signal=1KHz

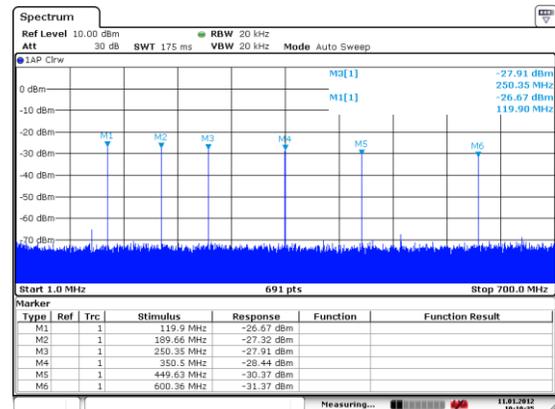

Multi Carrier Output

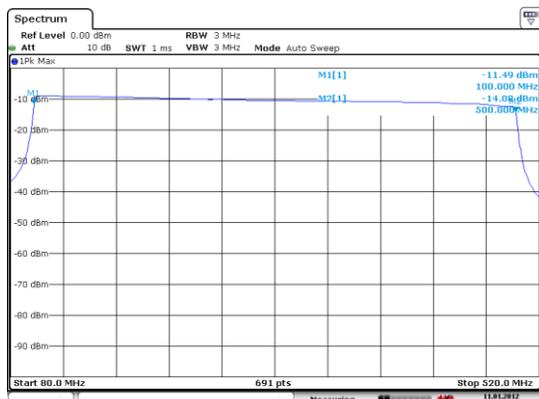

400MHz Wideband Sweep from 100-500MHz

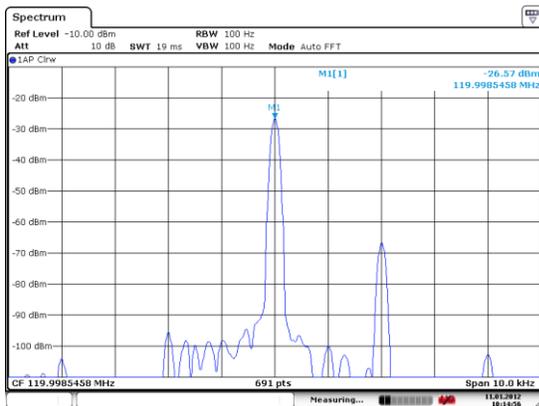

SSB Modulation with 35dB Carrier Suppression

#### ACKNOWLEDGMENT

The authors would like to acknowledge the contribution of scientists of the VUHF ECM Systems Group of DLRL for design of the Digital Baseband Generator and development of the Firmware for the generation of various waveforms. Also acknowledged are the development efforts of the PCB design group of CoreEL Technologies, who have directly or indirectly worked on various aspects of this design and contributed significantly to its success.

#### REFERENCES

- 1 David Adamy, *EW 101, A First Course in Electronic Warfare*
- 2 High density FPGA Based Waveform Generation for Radars - Taniza Roy, Kaushal Jadia, G.S.N Raju, Chandramohan M
- 3 User Guide, *Virtex-5 FPGA User Guide UG190*, Xilinx
- 4 MicroBlaze, *MicroBlaze Processor Reference guide*, Xilinx

#### BIO DATA OF AUTHORS

Arun Kumar Ch Graduated in Electronics and Communication Engineering from Sri Krishnadevaraya University, Anantapur, Andhra Pradesh in 2001. Later he did his Masters in VLSI System from NIT Trichy in 2003. He is presently working as Scientist in DLRL Hyderabad in Communication ECM Wing. He has around 9 years of experience the field of FPGA & Mixed Signal system designs involving hardware, software and RTL components. Domain

strengths include ASIC Design, Analog Circuits Design and telecommunication.

M.V.Ravindra Kumar received his B.Tech from S.V.University, Tirupati India and M.E. from Osmania University, Hyderabad, India in the years 1993 and 2005 respectively. He has been working as Scientist since 1996 for the development of Communication EW Systems in the Defence Electronics Research Laboratory (DLRL-DRDO), Hyderabad, India. He is presently heading the Communication ECM Systems Division.

J. Manjula received her engineering degree from Institution of Electronics & Tele-Communications Engineers, New Delhi, India in 1984 and post graduate degree in engineering from University College of Engineering, Osmania University, Hyderabad, India in the year 1993. She joined DLRL, Hyderabad in the year 1987 and has been working in the field of Communication EW since then. She is presently functioning as Head, Communication ECM wing and as Project Director for various prestigious EW Programmes and Technology Demonstration Projects on Communication ECM.

Nitesh Gupta graduated in Electronics and Communication Engineering from NIT Hamirpur, Himachal Pradesh in 1998. Later, he did his Masters in Software Systems from BITS, Pilani in 2006. He is presently working with CoreEL Technologies (I) Pvt. Ltd., Bangalore as a Manager, Systems Engineering Group. He has around 13 years of experience in the field of FPGA / Processor based system designs involving hardware, software and RTL components. Domain strengths include RADAR processing, telecommunication and networking.

Vikas Akalwadi graduated in Electronics and Communication Engineering from Karnataka University, Dharwad in 2000. He is presently working in CoreEL Technologies (I) Pvt. Ltd., Bangalore as a member of System Engineering Group. He has around 11 years of experience in the field of RTL designs for FPGAs. He has previously worked on projects involving building of FPGA based systems and IPs in the domain of Video Signal Processing, Networking, Processor System Bus and Digital Signal Processing.

Phaneendra did his special Diploma in Electronics and Communication Engineering from GIOE, Secunderabad in 2007. Later, he started his Bachelors in Electronics and Telecommunications engineering from AMIETE. He is presently working in CoreEL Technologies (I) Pvt. Ltd., Bangalore as a member of System Engineering Group. He has more than 4 years of experience in the field of RTL designs for FPGAs, RTL Verification and Validation. He has previously worked on projects involving development of FPGA based systems and IPs in the domain of Computer Networking and Digital Signal Processing.